


## CableLine CLI O 10-3 GE/SW P MP

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

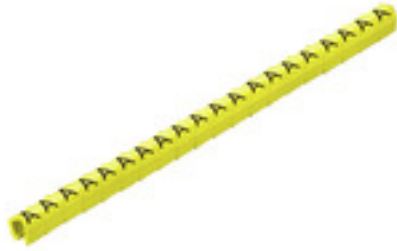

Similar to illustration

CLI O conductor markers are fitted to connected conductors, and are therefore suitable for updating existing systems. Without problems, three different sizes can be used for marking conductor cross-sections from 0.4 mm<sup>2</sup> to max. 4.0 mm<sup>2</sup>. The shape and design guarantee secure and permanent attachment of the individually combinable markers.

### Advantages:

- Open markers for connected conductors
- Marker version with anti-rotation safeguard for secure combination marking
- Perfect for any supplementary labelling
- Extremely low space requirements
- Rapid clip-on attachment saves time

### General ordering data

Type	CLI O 10-3 GE/SW P MP
Order No.	<a href="#">0648001667</a>
Version	CableLine, Conductor and cable markers, 2 - 3 mm, 3 x 4 mm, yellow
GTIN (EAN)	4008190010188
Qty.	200 pc(s).

**CableLine**  
**CLI O 10-3 GE/SW P MP**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	4 mm	Width (inches)	0.157 inch
Height	3 mm	Height (inches)	0.118 inch
Depth	4 mm	Depth (inches)	0.157 inch
Net weight	0.035 g		

**General data**

Colour	yellow	Colour of printing	black
Halogen	Yes	Material	PVC, soft, without Cadmium
Material colour according to resistance code	4	Operating temperature range	-30...80 °C
Orientation of print	horizontal	Printed characters	Upper-case letters
Printing	P	Printing method	hot-embossing
Recommended industries	Process, Machinery	Type of printing	Standard
UL 94 flammability rating	V-0	Version	MultiPack
Width	4 mm		

**Conductor and cable markers**

Conductor O.D.	2 - 3 mm	Conductor O.D., max.	3 mm
Conductor O.D., min.	2 mm	Conductor cross-section, max.	1.5 mm <sup>2</sup>
Conductor cross-section, min.	0.4 mm <sup>2</sup>	Halogen	Yes

**Classifications**

ETIM 6.0	EC001530	ETIM 7.0	EC001530
eClass 9.0	27-40-04-01	eClass 9.1	27-40-04-01
eClass 10.0	27-40-04-01	UNSPSC	44-12-17-08

**Approvals**

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">EPLAN, WSCAD</a>
------------------	------------------------------

**Data sheet**

**CableLine**  
**CLI O 10-3 GE/SW P MP**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



Similar to illustration