

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com





Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Our sensor cables come with 360° shielding which provides protection against electromagnetic interference. Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

SAIL-M12W-8S1.5U
<u>1276060150</u>
Sensor/actuator line, One end without connector, M12, Number of poles : 8, 1.5 m, pin, 90°, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No
4050118066210
1 pc(s).

Technical data



Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Net weight	104 g		
-	-		
Environmental Product Comp	liance		
REACH SVHC	Lead 7439-92-1		
Technical specifications for c	able		
Number of poles	8	Core cross-section	0.25 mm ²
Outside diameter	6.3 mm ± 0.2 mm	Cable length	1.5 m
Shielded	Yes	Insulation	PP
Colour coding	blue, red, white, brown, green, yellow, grey, pink	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-2580 °C	Temperature range, stationary	-4080 °C
Outer cladding in accordance with UL AWM style	20549 (80 °C / 300 V)	Suitable for cable carriers	Yes
Torsion resistance	360 °/m	Bending radius, min., stationary	5 x cable diameter
Bending radius, min., moving	12 x cable diameter	Acceleration	5 m/s²
Speed	100 m/min	Bending cycles	1 mill.
Resistant to welding beads	No	Configurable cable length	No
General technical data			
Version	pin, 90°	Connection thread	M12
Housing main material	PUR	Threaded ring material	Brass, nickel-plated
Coding	A	Protection degree	IP67, when screwed ir
Contact surface	Gold-plated	LED	No
Rated voltage	30 V	Rated current	2 A
nsulation strength	10 ⁸ Ω	Temperature range of housing	-25+80 °C
Tightening torque	M12: 0.8 - 1.2 Nm	Plugging cycles	≥ 100
Pollution severity	3	jumpered	No
Standards			
Connector standard	IEC 61076-2-101	Certificate no. (cULus)	E307231
Classifications			
	EC001955	ETIN 7 O	EC001955
ETIM 6.0 eClass 9.0	EC001855	ETIM 7.0	EC001855 27-06-03-11
eClass 9.0 eClass 10.0	27-06-03-11 27-06-03-11	eClass 9.1	27-00-03-11
Approvals	2,000011		
Approvals	շՄԵրու		
	LISTED		
ROHS	Conform		

Creation date May 2, 2020 7:03:01 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

Technical data

Downloads

Brochure/Catalogue	CAT 8 SAI 15/16 EN	
Broonardy outdrogue		
	FL FIELDWIRING EN	
Engineering Data	EPLAN, WSCAD	
Engineering Bata		



Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Drawings




Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

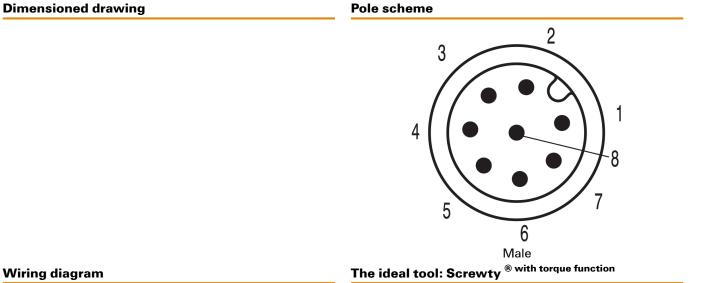

Wiring diagram





Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 192000000 Adapters: M12, M12 F, M8, M8 F

Accessories

Tool



Weidmüller 🟵

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Tools for stripping the sheathing from uncut power lines and outlet lines, plus screwdrivers for installing Pick-to-Light components.

General ordering data			
Туре	SCREWTY-M12-DM	Version	
Order No.	<u>1900001000</u>	Tools, Cable gland tool for moulded M12 lines	
GTIN (EAN)	4032248436408		
Qty.	1 pc(s).		

Tools



- · Stripping tools with automatic self-adjustment
- For flexible and solid conductors
- Ideally suitable for mechanical and plant engineering, railway and rail traffic, wind energy, robot technology, explosion protection as well as marine, offshore and ship building sectors
- Stripping length adjustable via end stop
- Automatic opening of clamping jaws after stripping
- No fanning-out of individual conductors
- Adjustable to diverse insulation thicknesses
- Double-insulated cables in two process steps without special adjustment
- No play in self-adjusting cutting unit
- Long service life
- Optimised ergonomic design

General ordering data

Туре	STRIPPER 6-16 RED-LINE	Version
Order No.	<u>9203110000</u>	Stripping and cutting tool, 16mm ²
GTIN (EAN)	4032248541423	
Qty.	1 pc(s).	



Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Accessories

Cutting tools for outside diameters up to 22 mm



Cutting tools for conductors up to 8 mm, 12 mm, 14 mm and 22 mm outside diameter. The special blade geometry allows pinch-free cutting of copper and aluminium conductors with minimum physical effort. The cutting tools also come with VDE and GS-tested protective insulation up to 1,000 V in accordance with EN/IEC 60900.

General ordering data

Туре	KT 8	Version
Order No.	9002650000	Cutting tools ,Cutting tool for one-hand operation
GTIN (EAN)	4008190020163	
Qty.	1 pc(s).	

Blank



TM-I is an acknowledged and accredited marker type for traffic engineering applications. There are five different tag lengths available for individual labelling with long character strings. Easy handling of separation and installation thanks to the project marker field. Preattachment of sleeves and retrofitting of tags offer excellent versatility

The special contour of TM-I allows easy assembly and secures firm positioning. They are compatible with a number of commercially available sleeves. Thanks to the MultiCard format, the tags can be printed quickly and conveniently with the SMark laser printer, PrintJet ADVANCED, plotter, MC-Mobilo or the STI pen.

- Easy handling of separation and installation thanks to the project marker field.
- Acknowledged and accredited marker for traffic engineering applications
- Pre-attachment of sleeves and retrofitting of tags offer excellent versatility
- Not suited for labelling with P-Ink or STI pen in connection with CLI T sleeves

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

 Type
 TM-I 18 MC NE GE

 Order No.
 1718431687

 GTIN (EAN)
 4008190349028

 Qty.
 320 pc(s).

TM-I, Insert markers, 18 x 4 mm, yellow

Creation date May 2, 2020 7:03:01 PM CEST

Version




Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Accessories

Туре	TM-I 18 MC NE WS	Version
Order No.	<u>1718431044</u>	TM-I, Insert markers, 18 x 4 mm, white
GTIN (EAN)	4008190349011	
Qty.	320 pc(s).	

Tools





Version

General ordering data

 Type
 AM 12

 Order No.
 9030060000

 GTIN (EAN)
 4008190337827

 Qty.
 1 pc(s).

Tools, Sheathing strippers, UTP and STP data cables

Screwty® cable gland tool with torque function



The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

General ordering data

Туре	SAI-SCREWTY BOX	Version
Order No.	<u>1939180000</u>	Tools, Bolting tool
GTIN (EAN)	4032248615506	
Qty.	1 pc(s).	