

OMNIMATE Power - Powerbus series CB1,6R22-20 AU,75 I1,8

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



Similar to illustration

For a reliable contact - CB/CS crimp contact.

The combination of RSV housings and Weidmüller's crimp contacts enable custom adaptations to the specific requirements of your applications.

The following product options are available depending on the system:

- Safe centring of the contacts using the three-segment pin tips
- High contact reliability using four defined contact points
- Locking clasp in the cantilever spring for a secure mount of the contacts in the housing
- Pin contacts with two lengths to implement leading-pin contacts
- Up to 100 plugging cycles (tin version)
- Up to 500 plugging cycles (gold version)

The appropriate high-quality tools from Weidmüller guarantee professional processing.

General ordering data

Type	CB1,6R22-20 AU,75 I1,8
Order No.	1422800000
Version	PCB plug-in connector, Crimp contact, Reel packaged, Socket connector, Gold-plated, Max. clamping range : 0.5 mm ²
GTIN (EAN)	4008190020460
Qty.	5,000 pc(s).
Product data	
Packaging	Reel

**OMNIMATE Power - Powerbus series
CB1,6R22-20 AU,75 I1,8**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	0.83 g
------------	--------

System Parameters

Product family	OMNIMATE Power - Powerbus series	Wire connection method	Crimp connection
Number of poles	1	Volume resistance	4.80 mΩ
Stripping length	4 mm		

Material data

Contact material	CuZn	Contact surface	Gold-plated
Storage temperature, min.	-25 °C	Storage temperature, max.	50 °C
Max. relative humidity during storage	70 %	Operating temperature, min.	-50 °C
Operating temperature, max.	100 °C	Temperature range, installation, min.	-25 °C
Temperature range, installation, max.	100 °C		

Conductors suitable for connection

Clamping range, min.	0.34 mm ²	Clamping range, max.	0.5 mm ²
Wire connection cross section AWG, min.	AWG 22	Wire connection cross section AWG, max.	AWG 20
Outer diameter of insulation, min.	1.1 mm	Outer diameter of insulation, max.	1.8 mm
Max. clamping range	0.5 mm ²		

Rated data acc. to IEC

tested acc. to standard	IEC 60664-1, IEC 61984
-------------------------	------------------------

Packing

Packaging	Reel	VPE length	20 mm
VPE width	450 mm	VPE height	450 mm

Classifications

ETIM 6.0	EC002943	ETIM 7.0	EC002943
eClass 9.0	27-44-04-92	eClass 9.1	27-44-04-92
eClass 10.0	27-44-04-92	UNSPSC	30-21-19-23

Notes

Notes	<ul style="list-style-type: none"> The long pins can be used with the standard pins as leading contacts.
IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

Approvals

Approvals



ROHS	Conform
------	---------

Creation date May 4, 2020 8:45:39 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

Data sheet**OMNIMATE Power - Powerbus series
CB1,6R22-20 AU,75 I1,8**

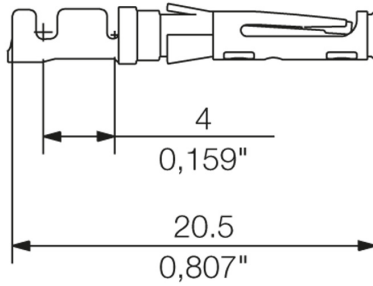
Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Downloads**

Approval/Certificate/Document of Conformity	Declaration of the Manufacturer
Brochure/Catalogue	MB DEVICE MANUF. EN CAT 2 PORTEFOLIOGUIDE EN FL 72H SAMPLE SER EN PO OMNIMATE EN
Engineering Data	STEP

**OMNIMATE Power - Powerbus series
CB1,6R22-20 AU,75 I1,8**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings**Dimensional drawing**

Data sheet

**OMNIMATE Power - Powerbus series
CB1,6R22-20 AU,75 I1,8**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Non-contact tools



Tools for dismantling Weidmüller crimp contacts

General ordering data

Type	DW RSV 1.6	Version
Order No.	9004530000	Tool miscellaneous, Release tool
GTIN (EAN)	4008190041991	
Qty.	1 pc(s).	

HTF RSV



Crimping tools for Weidmüller contacts for RSV and DSTV-HD systems

- Ratchet guarantees precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

General ordering data

Type	HTF RSV 16 WI	Version
Order No.	9013560000	Pressing tool, Crimping tool for contacts, FoderBcrimp
GTIN (EAN)	4008190161163	
Qty.	1 pc(s).	