

## OMNIMATE Power - Powerbus series CSL1,6E22-20 SN I2,5

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



Similar to illustration

### For a reliable contact - CB/CS crimp contact.

The combination of RSV housings and Weidmüller's crimp contacts enable custom adaptations to the specific requirements of your applications.

The following product options are available depending on the system:

- Safe centring of the contacts using the three-segment pin tips
- High contact reliability using four defined contact points
- Locking clasp in the cantilever spring for a secure mount of the contacts in the housing
- Pin contacts with two lengths to implement leading-pin contacts
- Up to 100 plugging cycles (tin version)
- Up to 500 plugging cycles (gold version)

The appropriate high-quality tools from Weidmüller guarantee professional processing.

### General ordering data

|              |  |
|--------------|--|
| Type         | CSL1,6E22-20 SN I2,5   |
| Order No.    | <a href="#">1425700000</a>   |
| Version      | PCB plug-in connector, Crimp contact, Individual contact, Pin &dash; long, tinned, Max. clamping range : 0.5 mm <sup>2</sup> |
| GTIN (EAN)   | 4008190175016  |
| Qty.         | 250 pc(s).   |
| Product data |  |
| Packaging    | Box  |

**OMNIMATE Power - Powerbus series  
CSL1,6E22-20 SN I2,5**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |
|------------|---------|
| Net weight | 0.552 g |
|------------|---------|

**System Parameters**

|                  |                                  |                        |                  |
|------------------|----------------------------------|------------------------|------------------|
| Product family   | OMNIMATE Power - Powerbus series | Wire connection method | Crimp connection |
| Number of poles  | 1                                | Volume resistance      | 3.30 mΩ          |
| Stripping length | 4 mm                             |                        |                  |

**Material data**

|                                       |        |                                       |        |
|---------------------------------------|--------|---------------------------------------|--------|
| Contact material                      | CuZn   | Contact surface                       | tinned |
| Storage temperature, min.             | -25 °C | Storage temperature, max.             | 50 °C  |
| Max. relative humidity during storage | 70 %   | Operating temperature, min.           | -50 °C |
| Operating temperature, max.           | 100 °C | Temperature range, installation, min. | -25 °C |
| Temperature range, installation, max. | 100 °C |                                       |        |

**Conductors suitable for connection**

|   |                      |   |                     |
|---|----------------------|---|---------------------|
| Clamping range, min.                    | 0.34 mm <sup>2</sup> | Clamping range, max.                    | 0.5 mm <sup>2</sup> |
| Wire connection cross section AWG, min. | AWG 22               | Wire connection cross section AWG, max. | AWG 20              |
| Outer diameter of insulation, min.      | 2 mm                 | Outer diameter of insulation, max.      | 2.5 mm              |
| Max. clamping range                     | 0.5 mm <sup>2</sup>  |   |                     |

**Rated data acc. to IEC**

|                         |                        |
|-------------------------|------------------------|
| tested acc. to standard | IEC 60664-1, IEC 61984 |
|-------------------------|------------------------|

**Packing**

|           |       |            |       |
|-----------|-------|------------|-------|
| Packaging | Box   | VPE length | 40 mm |
| VPE width | 70 mm | VPE height | 90 mm |

**Classifications**

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC000796    | ETIM 7.0   | EC000796    |
| eClass 9.0  | 27-44-02-04 | eClass 9.1 | 27-44-02-04 |
| eClass 10.0 | 27-44-02-04 | UNSPSC     | 30-21-19-23 |

**Notes**

|                |  |
|----------------|--|
| Notes          | <ul style="list-style-type: none"> <li>The long pins can be used with the standard pins as leading contacts.</li> </ul>  |
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request. |

**Approvals**

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

Creation date May 4, 2020 8:20:09 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

**Data sheet****OMNIMATE Power - Powerbus series  
CSL1,6E22-20 SN I2,5**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**

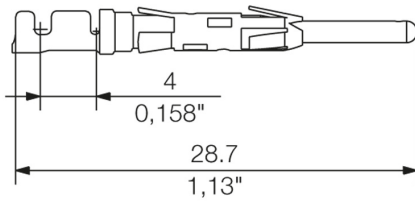
---

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a>   |
| Brochure/Catalogue                          | <a href="#">MB DEVICE MANUF. EN</a><br><a href="#">CAT 2 PORTEFOLIOGUIDE EN</a><br><a href="#">FL 72H SAMPLE SER EN</a><br><a href="#">PO OMNIMATE EN</a> |
| Engineering Data                            | <a href="#">STEP</a>  |

---

**Data sheet****OMNIMATE Power - Powerbus series  
CSL1,6E22-20 SN I2,5**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings****Dimensional drawing**

**Data sheet**

**OMNIMATE Power - Powerbus series  
CSL1,6E22-20 SN I2,5**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Accessories**

**Non-contact tools**



Tools for dismantling Weidmüller crimp contacts

**General ordering data**

|            |                            |                                  |
|------------|----------------------------|----------------------------------|
| Type       | DW RSV 1.6                 | Version                          |
| Order No.  | <a href="#">9004530000</a> | Tool miscellaneous, Release tool |
| GTIN (EAN) | 4008190041991              |                                  |
| Qty.       | 1 pc(s).                   |                                  |

**HTF RSV**



**Crimping tools for Weidmüller contacts for RSV and DSTV-HD systems**

- Ratchet guarantees precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

**General ordering data**

|            |                            |  |
|------------|----------------------------|--|
| Type       | HTF RSV 16 WI              | Version  |
| Order No.  | <a href="#">9013560000</a> | Pressing tool, Crimping tool for contacts, FoderBcrimp |
| GTIN (EAN) | 4008190161163              |  |
| Qty.       | 1 pc(s).                   |  |
| Type       | HTF RSV 12                 | Version  |
| Order No.  | <a href="#">9013550000</a> | Pressing tool, Crimping tool for contacts, FoderBcrimp |
| GTIN (EAN) | 4008190002046              |  |
| Qty.       | 1 pc(s).                   |  |