

SAIL-M12G-T-5.0H**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Your peripheral devices should be supplied with greater power. With our new M12 plug-in connector, more than 250 V and 2 A is possible without problems. The compact S- and T-coded M12 plug-in connectors are designed for the transmission of up to 630 V AC or 60 V DC and 12 A.

General ordering data

Type	SAIL-M12G-T-5.0H
Order No.	2050700500
Version	Power cable, One end without connector, M12, Number of poles : 4, 5 m, pin, straight, Shielded: No, Sheath material: PUR, Halogen: No
GTIN (EAN)	4050118441949
Qty.	1 pc(s).

Creation date May 2, 2020 10:46:55 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

SAIL-M12G-T-5.0H**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 300 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Number of poles	4	Core cross-section	2.5 mm ²
Outside diameter	11 mm ± 0.4 mm	Cable length	5 m
Shielded	No	Insulation	PP
Colour coding	black, blue, white, brown	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-40...90 °C	Temperature range, stationary	-50...90 °C
Outer cladding in accordance with UL AWM style	20234 (80 °C / 1000 V)	Suitable for cable carriers	Yes
Bending radius, min., stationary	4 x cable diameter	Bending radius, min., moving	7.5 x cable diameter
Acceleration	5 m/s ²	Speed	5 m/s
Bending cycles	10 Mio	Resistant to welding beads	No
Configurable cable length	No		

General technical data

Version	pin, straight	Connection thread	M12
Housing main material	PUR	Coding	T
Protection degree	IP67, when screwed in	Contact surface	Gold-plated
Rated voltage	63 V	Rated current	12 A
Insulation strength	10 ⁸ Ω	Temperature range of housing	-25...+80 °C
Plugging cycles	≥ 100	Pollution severity	3

Standards

Connector standard IEC 61076-2-111

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
eClass 9.0	27-06-03-11	eClass 9.1	27-06-03-11
eClass 10.0	27-06-03-11		

Approvals

ROHS Conform

DownloadsBrochure/Catalogue [FL FIELDWIRING EN](#)


Data sheet

SAIL-M12G-T-5.0H


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings


Dimensioned drawing



Pole scheme

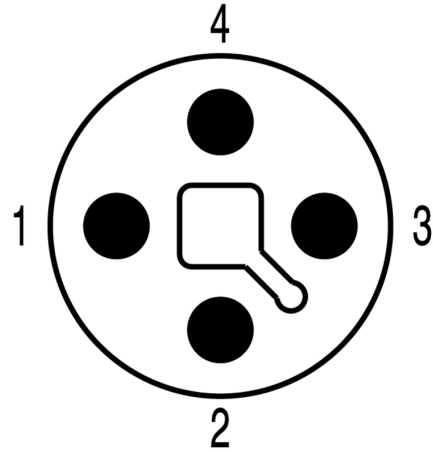

Wiring diagram

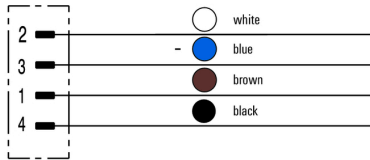

The ideal tool: Screwty[®] with torque function

