

WAVESERIES
WAZ5 DC/ALARM

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Do not use product for new
developments



Monitoring components for analogue DC current and voltage signals with integrated limit value monitoring and external power supply.

Input and output parameters can be optionally configured. The limit-value monitoring components are mounted on the DIN rail and can be used in all types of applications in process and industrial automation industries.

General ordering data

Type	WAZ5 DC/ALARM
Order No.	8543880000
Version	WAVESERIES, Limit value monitoring, 0(4)...20 mA, 1, 3 A, Tension-clamp connection
GTIN (EAN)	4032248181247
Qty.	1 pc(s).

Creation date May 1, 2020 7:23:01 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

**WAVESERIES
WAZ5 DC/ALARM**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Length	92.4 mm	Length (inches)	3.638 inch
Width	17.5 mm	Width (inches)	0.689 inch
Depth	112.4 mm	Depth (inches)	4.425 inch
Weight	131 g	Net weight	141 g

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature, max.	55 °C
Operating temperature, min.	0 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-20 °C	Operating temperature	0 °C...55 °C
Storage temperature	-20 °C...85 °C		

Probability of failure

MTTF	369 Jahre
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Number of inputs	1	Input voltage	0...10 V
Input resistance, voltage	≥ 100 kΩ	Input current	0(4)...20 mA
Input resistance, current	≤ 110 Ω		

Output

Contact material	AgNi 90/10	Switching thresholds	1...90 % (independently for channel 1 and channel 2)
Status indicator	LED green ON: OK, LED red ON: alarm (per channel)		

General data

Accuracy	Repeat accuracy: max. ± 0.3% of measuring range end value (10 V/ 20 mA)	Configuration	DIP switch, Potentiometer
Current-carrying capacity of cross- connect.	≤ 2 A	Galvanic isolation	3-way isolator
Input/Output	0...10 V, 0(4)...20 mA / 2 CO contact	Power consumption	Typ.: 1 W both relays picked up
Rail	TS 35	Temperature coefficient	≤ 500 ppm/K
Voltage supply	24 V DC ± 25 %		

Insulation coordination

Clearance & creepage distances	≥ 3 mm	EMC standards	EN 61000-4-2, -3, -4, -5, -6
Galvanic isolation	3-way isolator	Impulse withstand voltage	4 kV
Insulation voltage	2 kV _{eff} / 5 s	Pollution severity	2
Rated voltage	300 V	Surge voltage category	III

Creation date May 1, 2020 7:23:02 AM CEST

**WAVESERIES
WAZ5 DC/ALARM**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Output (digital)**

Alarm function	configurable, High or low alarm, Hysteresis 5% / 10%	Hysteresis	1...10 % (independent for channel 1 and channel 2)
Type	2 CO contacts, Open or closed-circuit principle	Max. switching voltage, AC	250 V
Continuous current	3 A	Contact material	AgNi 90/10

Connection data

Type of connection	Tension-clamp connection	Clamping range, rated connection	1.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²

Classifications

ETIM 6.0	EC002654	ETIM 7.0	EC002654
eClass 9.0	27-21-01-22	eClass 9.1	27-21-01-22
eClass 10.0	27-21-01-22	UNSPSC	30-21-18-01

Product information

Product information	This product will soon be replaced by a new product. Please do not use with new systems. Please contact our technical support.
---------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
User Documentation	instruction sheet

**WAVESERIES
WAZ5 DC/ALARM**


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings


Connection diagram

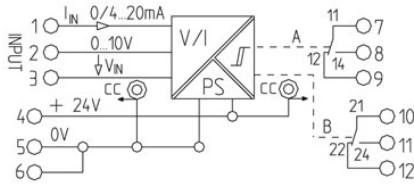

Example 1

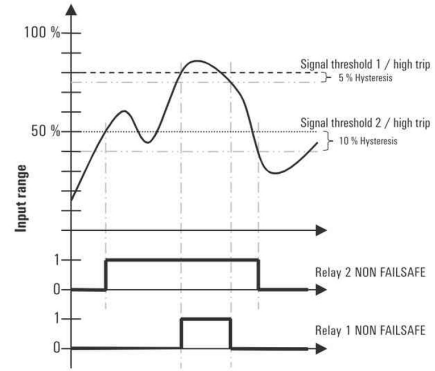

Example 2

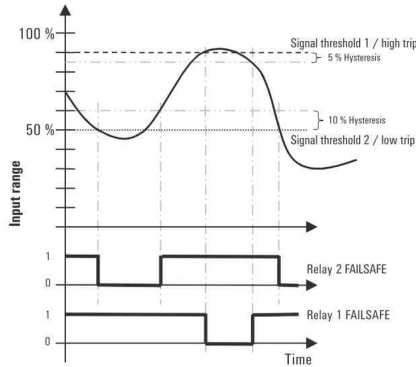

Switch position/setting options

function	SW 1			
	1	2	3	4
Channel A High Trip	■			
Channel A Low Trip	□			
Channel B High Trip		■		
Channel B Low Trip		□		
FAILSAFE, Channel 1 & 2			□	□
NON FAILSAFE, Chan. 1 & 2			■	■

■ = on
□ = off

**WAVESERIES
WAZ5 DC/ALARM**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

ZQV 2.5N



Spring connection with tension clamp Technology
 Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data


Type	ZQV 2.5N/2 RT	Version
Order No.	1717900000	Accessories, Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190349288	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 BL	Version
Order No.	1717990000	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349295	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 SW	Version
Order No.	1718080000	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349301	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 GE	Version
Order No.	1693800000	Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190883621	
Qty.	60 pc(s).	

**WAVESERIES
WAZ5 DC/ALARM**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	WS 10/5 MC NE WS	Version
Order No.	1635000000	WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller,
GTIN (EAN)	4008190261948	Allen-Bradley, white
Qty.	720 pc(s).	